

Appendix A: Site Maps and Drawings

TEWINKLE PARK

LAKE RENOVATION



PLAN APPROVAL:

REVIEWED FOR CONFORMANCE WITH CITY OF COSTA MESA STANDARDS AND REQUIREMENTS. APPROVAL FOR CONSTRUCTION IS SUBJECT TO THE INFORMATION SHOWN HEREIN. THE CITY OF COSTA MESA AND THE UNDERSIGNED ARE NOT RESPONSIBLE FOR ANY ERRORS OR OMISSIONS THAT MAY EXIST ON THESE PLANS.

CITY OF COSTA MESA

DATE:

R.C.E. NO.:

EXPIRES:

SITE PLAN

1"=60'

TITLE SHEET

TITLE

TEWINKLE PARK
LAKE RENOVATION
COSTA MESA CA

JOB

SHEET
W100
01 OF 50 SHEETS


JOB NO. B836



SCALE: 1"=40'

- 1 INSTALL GRAVEL BAG BARRIER PER CASQA BMP SE-6
- 2 INSTALL STABILIZED CONSTRUCTION ENTRANCE/EXIT PER CASQA BMP TC-1
- 3 INSTALL SILT FENCE PER CASQA BMP SE-1

R:\98346\Engineering\98346-13 (Bid Documents)\sheets\98346-13 M10 Erosion Control and Fencing Plan.dwg - Tab: 04 - By: rding on 07/22/24 at 10:53:43 AM

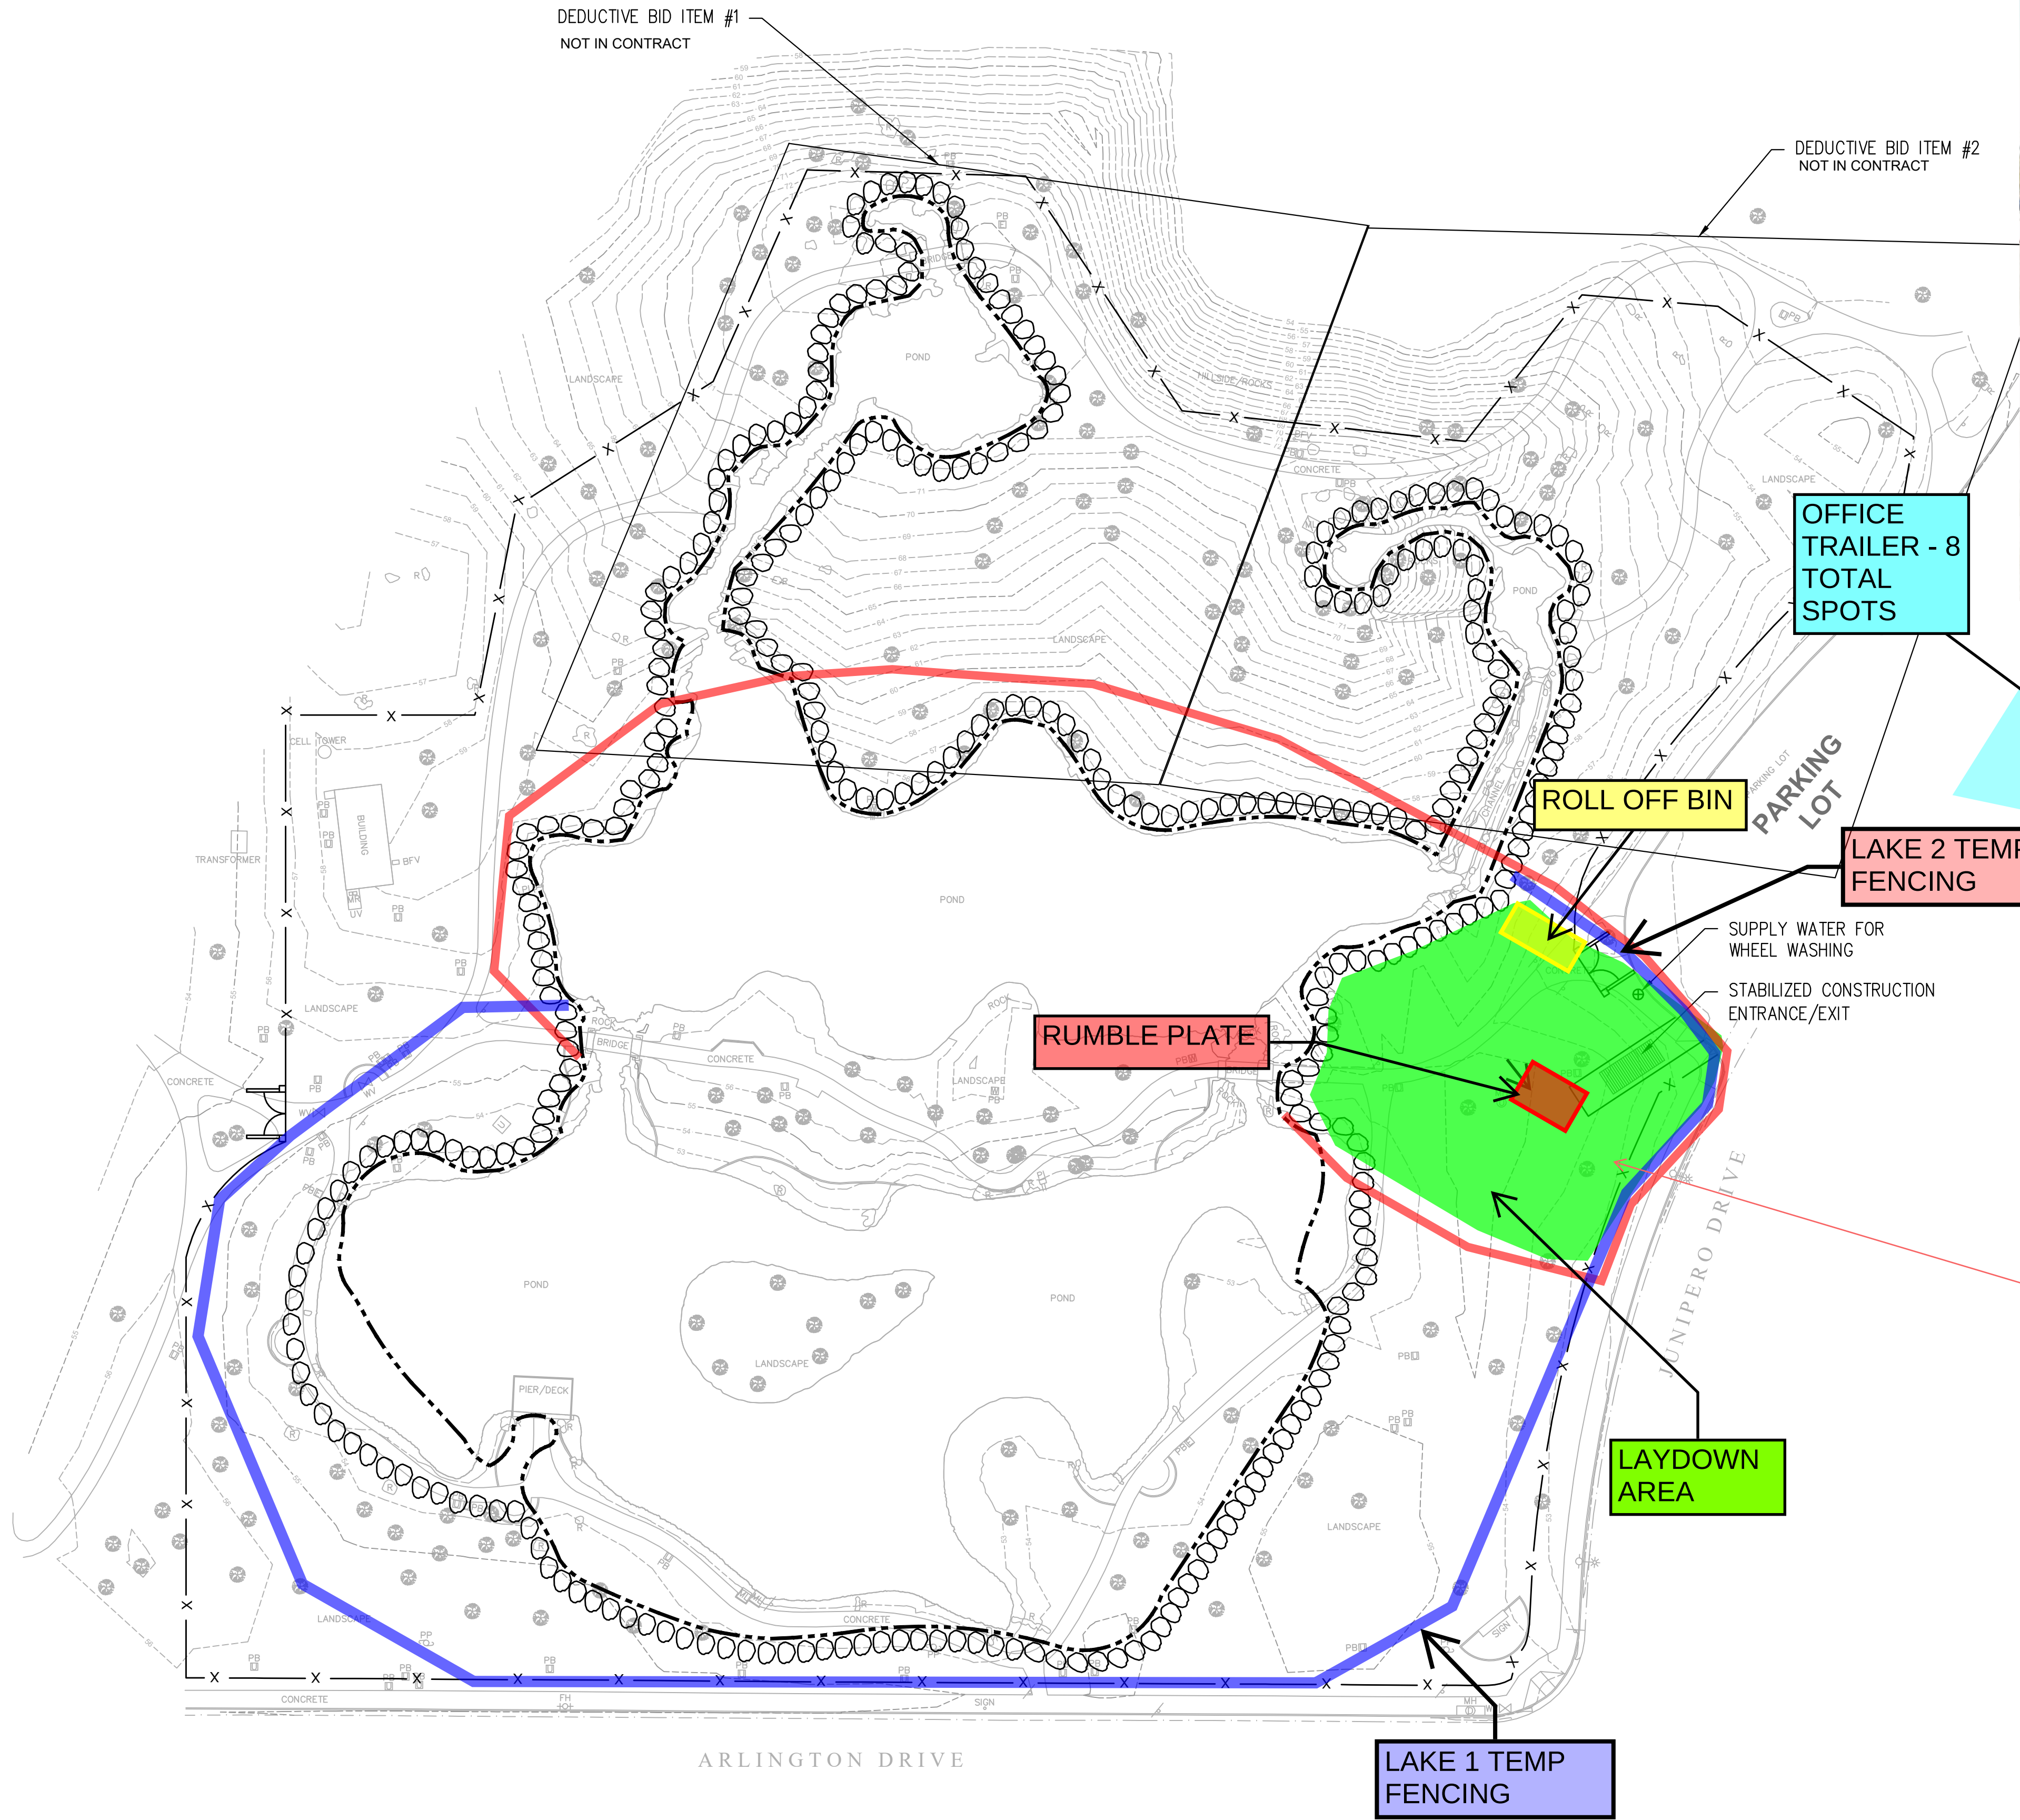

AND DISPOSED OF IN A PROPER MANNER. SPILLS MAY NOT BE WASHED INTO THE DRAINAGE SYSTEM, NOR BE ALLOWED TO SETTLE OR INFILTRATE INTO SOIL.

EXCESS OR WASTE CONCRETE MAY NOT BE WASHED INTO THE PUBLIC WAY OR ANY OTHER DRAINAGE SYSTEM. PROVISIONS SHALL BE MADE TO RETAIN CONCRETE WASTES ON SITE UNTIL THEY CAN BE DISPOSED OF AS SOLID WASTES.

- TRASH AND CONSTRUCTION SOLID WASTES SHALL BE DEPOSITED INTO A COVERED RECEPTACLE TO PREVENT CONTAMINATION OF RAINWATER AND DISPERSAL BY WIND.
- SEDIMENTS AND OTHER MATERIALS MAY NOT BE TRACKED FROM THE SITE BY VEHICULAR TRAFFIC. THE CONSTRUCTION ENTRANCE ROADWAYS MUST BE STABILIZED SO AS TO INHIBIT SEDIMENTS FROM BEING DEPOSITED INTO THE PUBLIC WAY. ACCIDENTAL DEPOSITS SHALL BE SWEEPED UP IMMEDIATELY AND MAY NOT BE WASHED DOWN BY RAIN OR OTHER MEANS.
- STORM WATER POLLUTION PREVENTION DEVICES AND / OR PRACTICES SHALL BE MODIFIED AS NEEDED AS THE PROJECT PROGRESSES TO ENSURE EFFECTIVENESS.

NOTE: ANY ADDITIONAL EROSION/SEDIMENT CONTROLS MEASURES CALLED OUT BY THE SWPPP WOULD SUPERSEDE THOSE SHOWN ON THIS SHEET.

EROSION CONTROL KEYNOTES:

- INSTALL GRAVEL BAG BARRIER PER CASQA BMP SE-6
- INSTALL STABILIZED CONSTRUCTION ENTRANCE/EXIT PER CASQA BMP TC-1
- INSTALL SILT FENCE PER CASQA BMP SE-1

Following BMPs will be implemented at staging area:
NS-8, NS-9, NS-10, WM-1, WM-2, WM-3, WM-4, WM-5, WM-6, WM-8, WM-9

NS-8: Vehicle and Equipment Cleaning
NS-9: Vehicle and Equipment Fueling
NS-10: Vehicle and Equipment Maintenance
WM-1: Material Delivery and Storage
WM-2: Material Use
WM-3: Stockpile Management
WM-4: Spill Prevention and Control
WM-5: Solid Waste Management
WM-6: Hazardous Waste Management
WM-8: Concrete Waste Management
WM-9: Sanitary-Septic Waste Management

EROSION CONTROL & FENCING PLAN

SCALE: 1"=40'

PREPARED ZIRANG	PROJ R.C.E. NO. 6/	EXP. 6/	DRAWN SP/RC/	DESIGNED BL	CHECKED ZS
TITLE EROSION CONTROL AND FENCING PLAN					
JOB TEWINKLE PARK LAKE RENOVATION					
COSTA MESA CA					
SHEET W110					
04 OF 50 SHEETS					
JOB NO. B836					