

No.	Description	Date	No.	Description	Date

Drawing Title: **EROSION CONTROL PLAN**

Architect's Seal:  Designed:   
Drawn:   
QA/QC:   
Date: 08-08-08

Project No.: 3200006-000  
Scale:   
Drawing No.: **C700**

CONSTRUCTION NOTES



1. INSTALL GRAVEL BAGS PER DETAIL "A" HEREON (TYP.)
2. INSTALL 6' HIGH CONSTRUCTION FENCE W/SCREEN ALL AROUND THE PROJECT PERIMETER
3. INSTALL STABILIZED ENTRANCE PER DETAIL "B" HEREON

EROSION CONTROL NOTES



1. "A STANDBY CREW FOR EMERGENCY WORK SHALL BE AVAILABLE AT ALL TIMES DURING THE RAINY SEASON. NECESSARY MATERIALS SHALL BE AVAILABLE ON SITE AND STOCKPILED AT CONVENIENT LOCATIONS TO FACILITATE RAPID CONSTRUCTION OF TEMPORARY DEVICES WHEN RAIN IS IMMINENT."
2. "DEVICES SHALL NOT BE MOVED OR MODIFIED WITHOUT THE APPROVAL OF THE INSPECTOR."
3. "ALL REMOVABLE PROTECTIVE DEVICES SHOWN SHALL BE IN PLACE AT THE END OF EACH WORKING DAY WHEN THE 5-DAY RAIN PROBABILITY FORECAST EXCEEDS 40%."
4. "AFTER A RAINSTORM, ALL SILT AND DEBRIS SHALL BE REMOVED FROM CHECK BERMS AND DESILTING BASINS AND THE BASINS PUMPED DRY."
5. "FILL SLOPES AT THE TRACT PERIMETER MUST DRAIN AWAY FROM THE TOP OF SLOPE AT THE CONCLUSION OF EACH WORKING DAY."
6. "A GUARD WILL BE POSTED ON THE SITE WHENEVER THE DEPTH OF WATER IN ANY DEVICE EXCEEDS TWO FEET."
7. "EROSION CONTROL SHALL BE INSTALLED WITHIN OR ADJACENT TO ANY GRADED AREAS AS SHOWN ON THE PLANS."

GRAVELBAG SPEC. NOTES

15"x30" POLYPROPYLENE GRAVELBAGS  
WOVEN POLYPROPYLENE - CONSTRUCTED TO RESIST SPLITS AND LEAKAGE. WITH ANTISKID DESIGN  
10 X 12 WEAVE  
950 DENIER  
1200 HOURS UV RATING  
MILK/WHITE COLOR  
1000 PER BALE

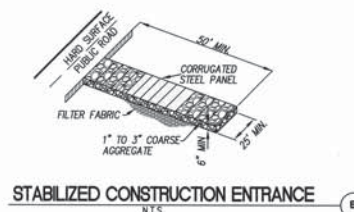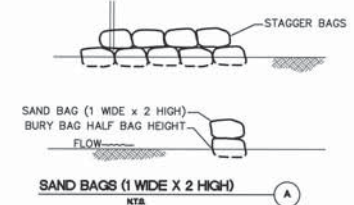

STABILIZED CONSTRUCTION ENTRANCE  
N.T.S.

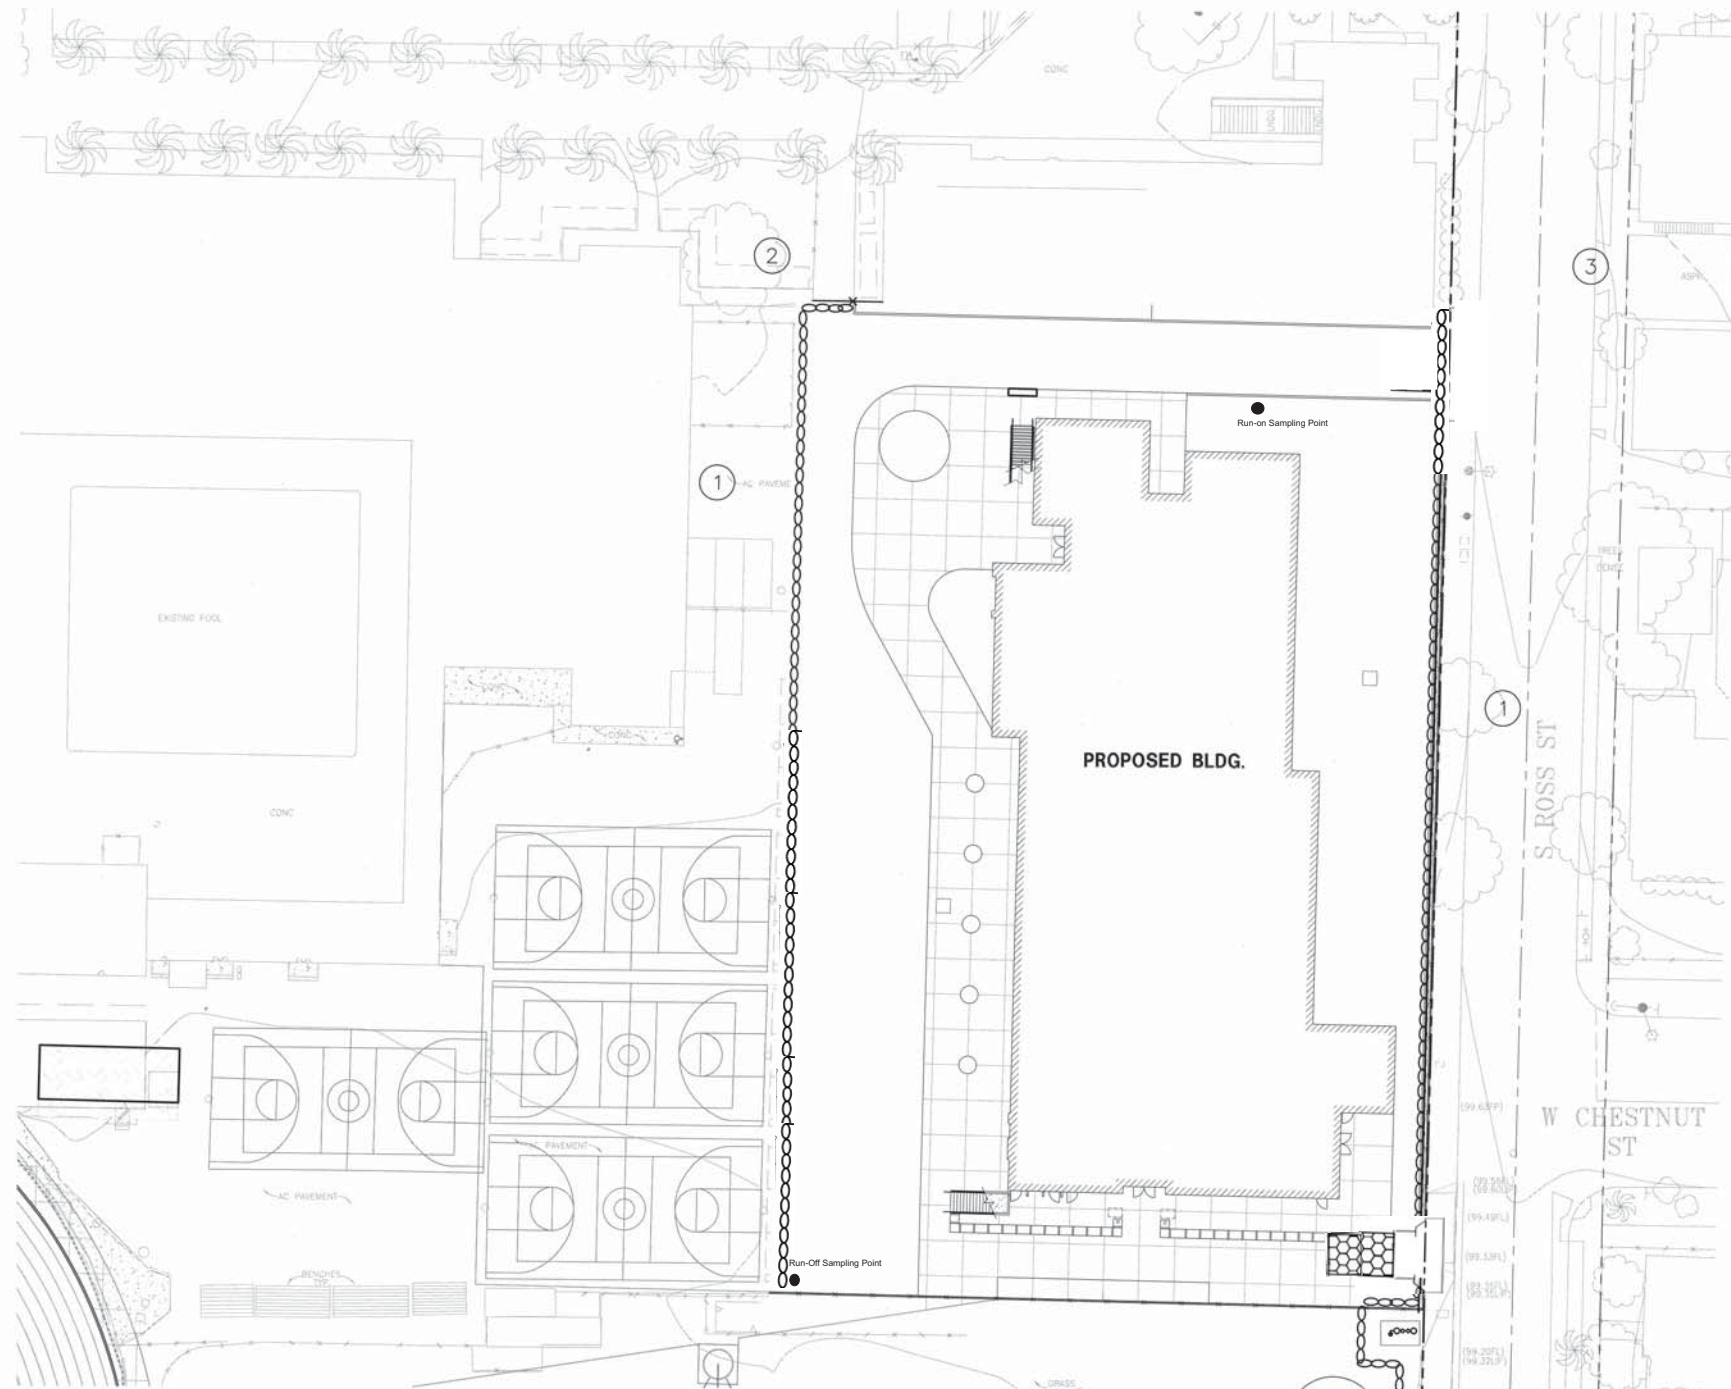

WPCD Revised per QSD - Michael R. Alberson  
CPSWQ, CPESC, CISEC, CESSWI, REA 1, TOR



Gravel Bag Berm 3/4" rock fill - 2 high

Stabilized Construction Entrance 30' x 50'